

Mounting your SONOS® ARC using the UM1-A adapter bracket

- Supports 300mm to 600mm VESA patterns
- Mount the L/R sides of the UM-1 bracket to the back of the TV following steps on **page 8**
- For 600mm spacing, swap the UM-1 Sandwich brackets so that the attached Vertical brackets face towards the center of the display. This will allow the UM1-A to reach the threaded insert on the SONOS® ARC
- **Please note:** The UM-1 (sandwich, vertical, and depth supports) and UM1-A adapter brackets may be flipped in various ways providing additional adjustment options. The right placement will depend upon your application

- **Remove the single slot depth support brackets** from the UM-1, but make sure to keep the carriage bolts and nylon nuts




- Replace with the UM1-A adapter bracket using the 1/4" carriage bolts and nylon nuts you removed



- Secure the UM1-A adapter bracket to the back of the SONOS® ARC by using the provided hardware in this recommended order: 18mm M5 bolt, lock washer, flat washer, fender washer and then into the SONOS® ARC using the hex key. We **strongly suggest** two people perform this action to ensure that you do not drop the SONOS® ARC while securing to the UM1-A



- Use the Height, Depth/Forward, and Tilt adjustments to place the SONOS® ARC in your desired location and lock into place using the nylon nuts (**do not over tighten**)

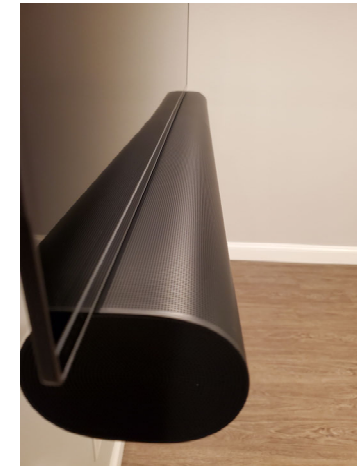

- **When using a Tilt Mount**—Use the Tilt adjustment feature to level the SONOS® ARC so that the Atmos drivers fire up from a level plane

Do not mount the SONOS® ARC above the TV